


FIBER GLASS TAPE OF DRY WALL JOINTS

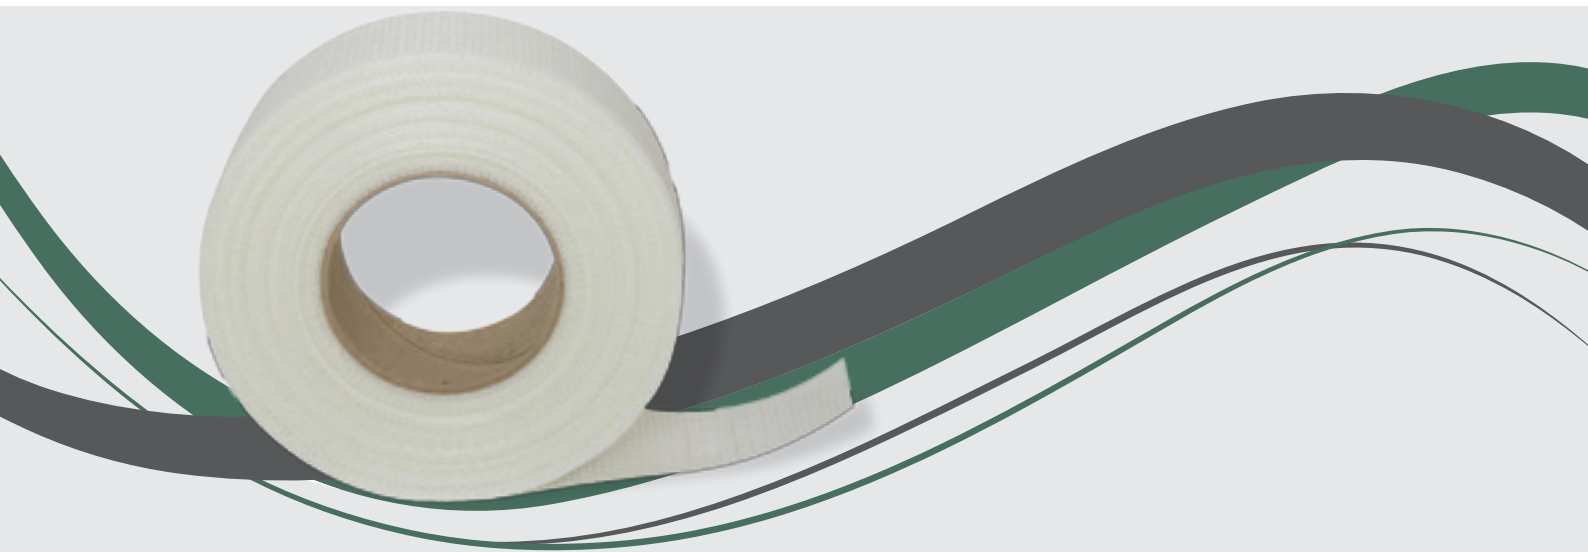

PRODUCT DESCRIPTION

Also known as Drywall Joint Tape is made from woven fiber to create a strong drywall joint. Ideal for Joint finishing and patching

FEATURES

- Fast and easy application
- Utilizes fiberglass yarns to greatly increase joint strength and durability for less cracking
- Permits same day joint finishing when used with a setting type compound
- Can also be used for patching holes and cracks
- Mesh tape allows compound penetration to strengthen the joint bond
- Self-adhesive to eliminate the need for an embedding coat
- Prevents blisters and bubbles
- Mold and moisture resistant

TYPICAL PHYSICAL PROPERTIES:

Material	Fiber Glass
Adhesive	Water Based Acrylic
Mesh Size	8 x 8
Nominal Mass	60gm/m ²

Total thickness Allowance: 2± micron



TYPICAL APPLICATIONS

Indoor painting, Masking, Packing, Marking, Bundling, Splicing General applications, Gift wrapping, Advertising, Decorations etc.

STORAGE & SHELF LIFE:

Product should be stored in a cool, dry area in original packing and to use within 12month of shipment stored at 21°C (70°F) / 50% relative humidity out of direct sunlight.

SURFACE PREPARATION

It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied need to be clean, dry, and free of grease, oil or other contaminants.

PRODUCT USE:

It is essential that the user evaluate the Asmaco tape product to determine whether it is fit for a particular purpose and user's method of application. Good results will be obtained when applied to a clean, dry surface with a suitable pressure on the Asmaco Tape product between +10 ~ +60°C (+50 ~ +140 °F).

LOCATION

