

DUCT TAPE



PRODUCT DESCRIPTION

PE-coated cloth Tape with a pressure sensitive rubber adhesive coating combined to provide a quality product. It is a good choice for bundling, heavy carton packing, general maintenance, pipe wrapping, carpet fixing, air-conditioning ducts seam and joint sealing etc.

FEATURES

- High Tensile Strength.
- Excellent Moisture Resistant, Easy Tear and Conforms well to irregular surfaces.
- Water resistant backing.
- Service Temperature range from -20° to +60°C (-4°to +140°F).

TYPICAL PHYSICAL PROPERTIES

PE Film Thickness	50 Micron	
Total Thickness	178 Micron	
Reinforcement	PET Cloth	
Tensile Strength	74 N/25mm	PSTC-31
Elongation	15%	
Adhesive	Natural Rubber / Resin	
Adhesion to Steel (in of Width)	41 (11 N/25mm)	PSTC-1
Quick Stick to Steel (in of width)	13.5 (3.7N/25mm)	PSTC-33
Colour	Silver Grey	

TYPICAL APPLICATIONS

Packaging, Wrapping & Sealing, Binding & Bundling, General Maintenance, Pipe Wrapping, Carpet Fixing, Air-Conditioning Duct's Seam and Joint Sealing .

SURFACE PREPARATION


It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied need to be clean, dry, and free of grease, oil or other contaminants.

STORAGE & SHELF LIFE

Product should be stored in a cool, dry area in original packing and to use within 12month of shipment stored at 21°C (70°F) / 50% relative humidity out of direct sunlight.

PRODUCT USE

Your exclusive remedy & Asmaco Tape obligation shall be, at Anchor Allied Factory's option, to replace or repair the product or refund the purchase price of the product.

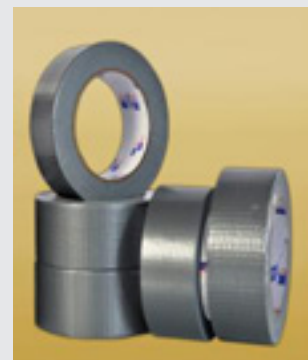

LOCATION

